
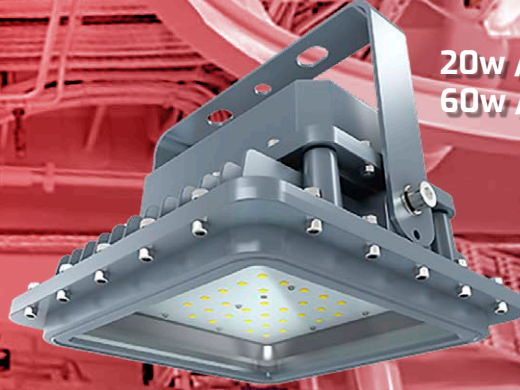



**AL-JI-DN**
**100w / 150w  
200w MODELS**
**20w / 40w  
60w / 80w MODELS**


## Certifications

20w / 40w / 60w / 80w MODELS

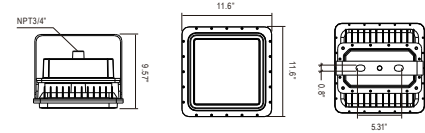

100w / 150w / 200w MODELS

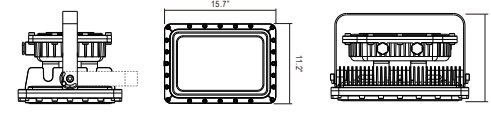

## Specifications

Model Name	AL-JI-DN-C1D1-20	AL-JI-DN-C1D1-40	AL-JI-DN-C1D1-60	AL-JI-DN-C1D1-80	AL-JI-DN-C1D1-100	AL-JI-DN-C1D1-150	AL-JI-DN-C1D1-200
Input Wattage (W)	20W	40W	60 W	80W	100W	150W	200W
Voltage (V)	U (120-277V) / HV (227-480V) / DC (12-48V)						
Lumen Output (lm)	2,800 lm	5,600 lm	8,400 lm	11,200 lm	14,000 lm	21,000 lm	28,000 lm
Efficacy (lm/W)	140 lm/W						
Color Rend. Index	80+ CRI						
Color Temperature	22 (2,200k) - 40 (4,000k) - 50 (5,000k) - 70 (7,000k)						
Dimmable	Yes						
Longevity (L70)	50,000 Hours						
Amb. Temperature	-40°C to 60°C / -40°F to 140°F						
Warranty	5 years						

## DESCRIPTION

This luminaire can be used as a spot light, down light, tunnel light, flood light and wall pack for general illumination in hazardous locations.

## FEATURES

- High efficacy: up to 140lm/W
- CRI>80
- Surface mounting and pendant installations
- Wide and narrow optics for uniform illumination
- Copper free aluminum
- High vibration resistance
- 5 years limited warranty

## Ordering Guide

EG: AL-JI-DN-C1D1-150-8-50-HV

Model Name	Wattage	CRI	CCT	Driver
AL-JI-DN-C1D1	20: 20 W 40: 40 W 60: 60 W 80: 80 W 100: 100 W 150: 150 W 200: 200 W	8: >80	22: 2200k 40: 4000k 50: 5000k 70: 7000k	U: Universal 120-277V HV: 277-840V DC: 12-48V