


Dimensional Drawing

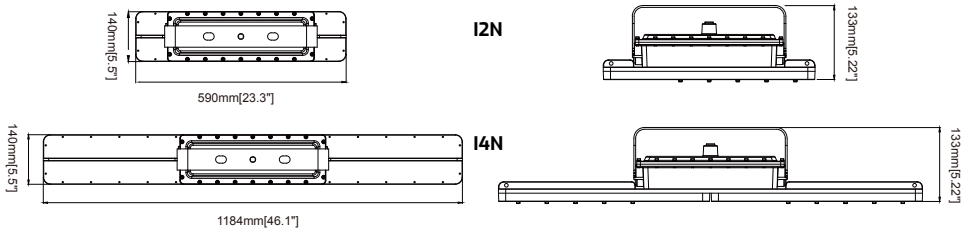

DESCRIPTION

This luminaire can be used as a spot light, down light, tunnel light, flood light, and wall light for general illumination in hazardous locations

FEATURES

- Working Temperature: -40°F to 140°F.
- High quality SMT LED and Meanwell Driver.
- Heavy-duty and high impact resistance.
- Replaceable LED board and drivers.
- Integrated junction box for driver .
- Dimmable and battery back up function available.
- Marine rating powder coated finish treatment.
- Up to 5 years warranty.
- Polycarbonate lens to make various beam angles.

Specifications

Model Name	AL-JI-I2N-C1D1-20	AL-JI-I2N-C1D1-40	AL-JI-I2N-C1D1-50	AL-JI-I2N-C1D1-60	AL-JI-I4N-C1D1-60	AL-JI-I4N-C1D1-80	AL-JI-I4N-C1D1-100	AL-JI-I4N-C1D1-120
Input Wattage (W)	20W	40W	50 W	60W	60W	80W	100W	120W
Voltage (V)	U (120-277V) / HV (227-480V) / DC (12-48V)							
Lumen Output (lm)	2,800 lm	5,600 lm	7,000 lm	8,400 lm	8,400 lm	12,000 lm	14,000 lm	16,800 lm
Efficacy (lm/W)	140 lm/W							
Color Rend. Index	80+ CRI							
Color Temperature	22 (2,200k) - 40 (4,000k) - 50 (5,000K) - 70 (7,000K)							
Dimmable	Yes							
Longevity (L70)	50,000 Hours							
Amb. Temperature	-40°C to 60°C / -40°F to 140°F							
Warranty	5 years							
Dimensions	23.3" x 5.5" x 5.22"				46.1" x 5.5" x 5.22"			

Ordering Guide

EG: AL-JI-I4N-C1D1-120-8-50-U

Model Name	Dimension	Wattage	CRI	CCT	Driver
AL-JI-	I2N-C1D1: 23.3" I4N-C1D1: 46.1"	20: 20 W 40: 40 W 50: 50 W 60: 60 W 60: 60 W 80: 80 W 100: 100 W 120: 120 W	8: >80	22: 2200k 40: 4000k 50: 5000k 70: 7000k	U: Universal 120-277V HV: 277-840V DC: 12-48V